

# CH10x38gPV 3A 1000V UL



## Specifications

ETI Code	002625100
Description	CH10x38gPV 3A 1000V UL
Class name	Fuse link
Rated current (A)	3
Type	CH
Size	10x38
Characteristics	gPV
Rated DC voltage (V)	1000
Breaking capacity DC (kA)	10
Power dissipation (W)	1,6
Standards	IEC 60269-6, UL 2579, UL 248-1
Power dissipation (0,7x I <sub>n</sub> ) (W)	0,65
Operating joule integral (A <sup>2</sup> s)	5
L/R (ms)	2
Prearcing joule integral (A <sup>2</sup> s)	3
Application	For protection of photovoltaic modules
UL certificate	E347771

Online product page 

## Other documentation




[Technical data catalogue](#)  
[Certificate](#)  
[3D Model](#)  
[Instruction manual](#)  
[CE declaration](#)  
[Eplan file](#)

## ETIM international classification

Classification	EC002704
Class name	Cylindrical fuse
Rated voltage DC	1000
Application	For protection of photovoltaic modules
Construction size	CH10
Rated current	3
Size	10x38 mm
Rated voltage	Other
Utilization category	Other
Nominal current	3A

# Characteristics

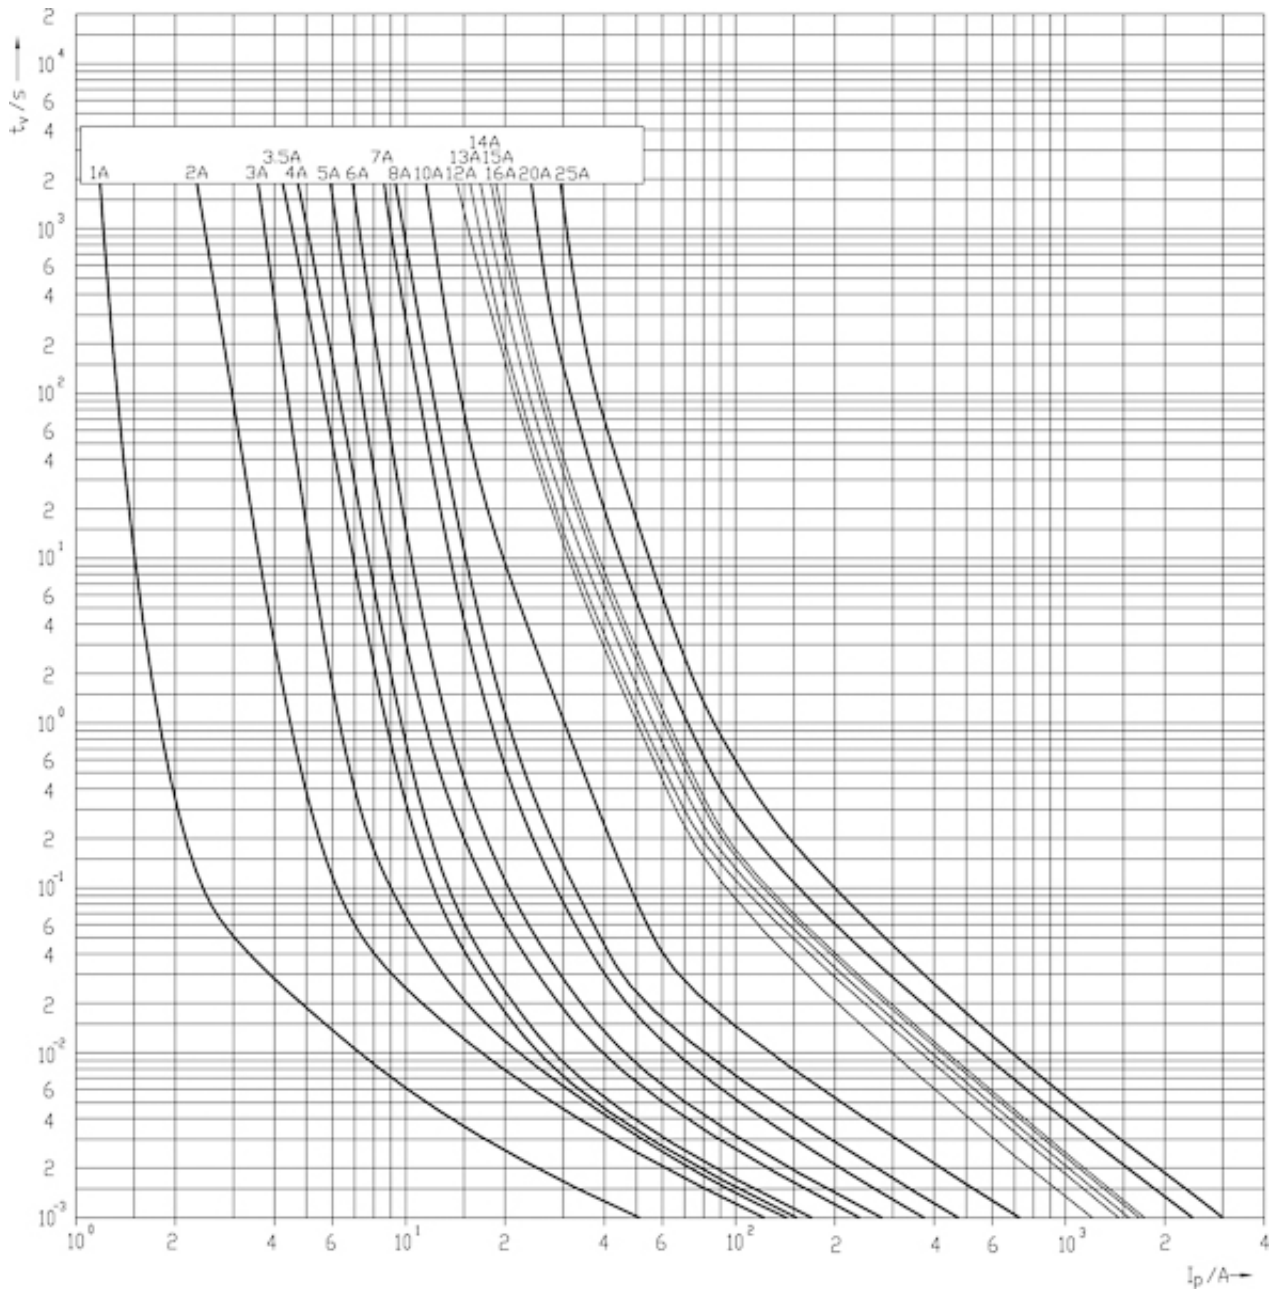

## Dimension drawing

