

CH10x38 gPV 15A 1000V UL



Specifications

ETI Code	002625112
Description	CH10x38 gPV 15A 1000V UL
Class name	Fuse link
Rated current (A)	15
Type	CH
Size	10x38
Characteristics	gPV
Rated DC voltage (V)	1000
Breaking capacity DC (kA)	10
Power dissipation (W)	2,2
Standards	IEC 60269-6, UL 2579, UL 248-1
Power dissipation (0,7x I _n) (W)	1
Operating joule integral (A2s)	145
L/R (ms)	2
Prearcing joule integral (A2s)	49
Application	For protection of photovoltaic modules
UL certificate	E347771

Online product page

Other documentation




[Technical data catalogue](#)
[Certificate](#)
[3D Model](#)
[Instruction manual](#)
[CE declaration](#)
[Eplan file](#)

ETIM international classification

Classification	EC000035
Class name	Miniature fuse
Rated current	15A
Rated voltage	1000V

Characteristics

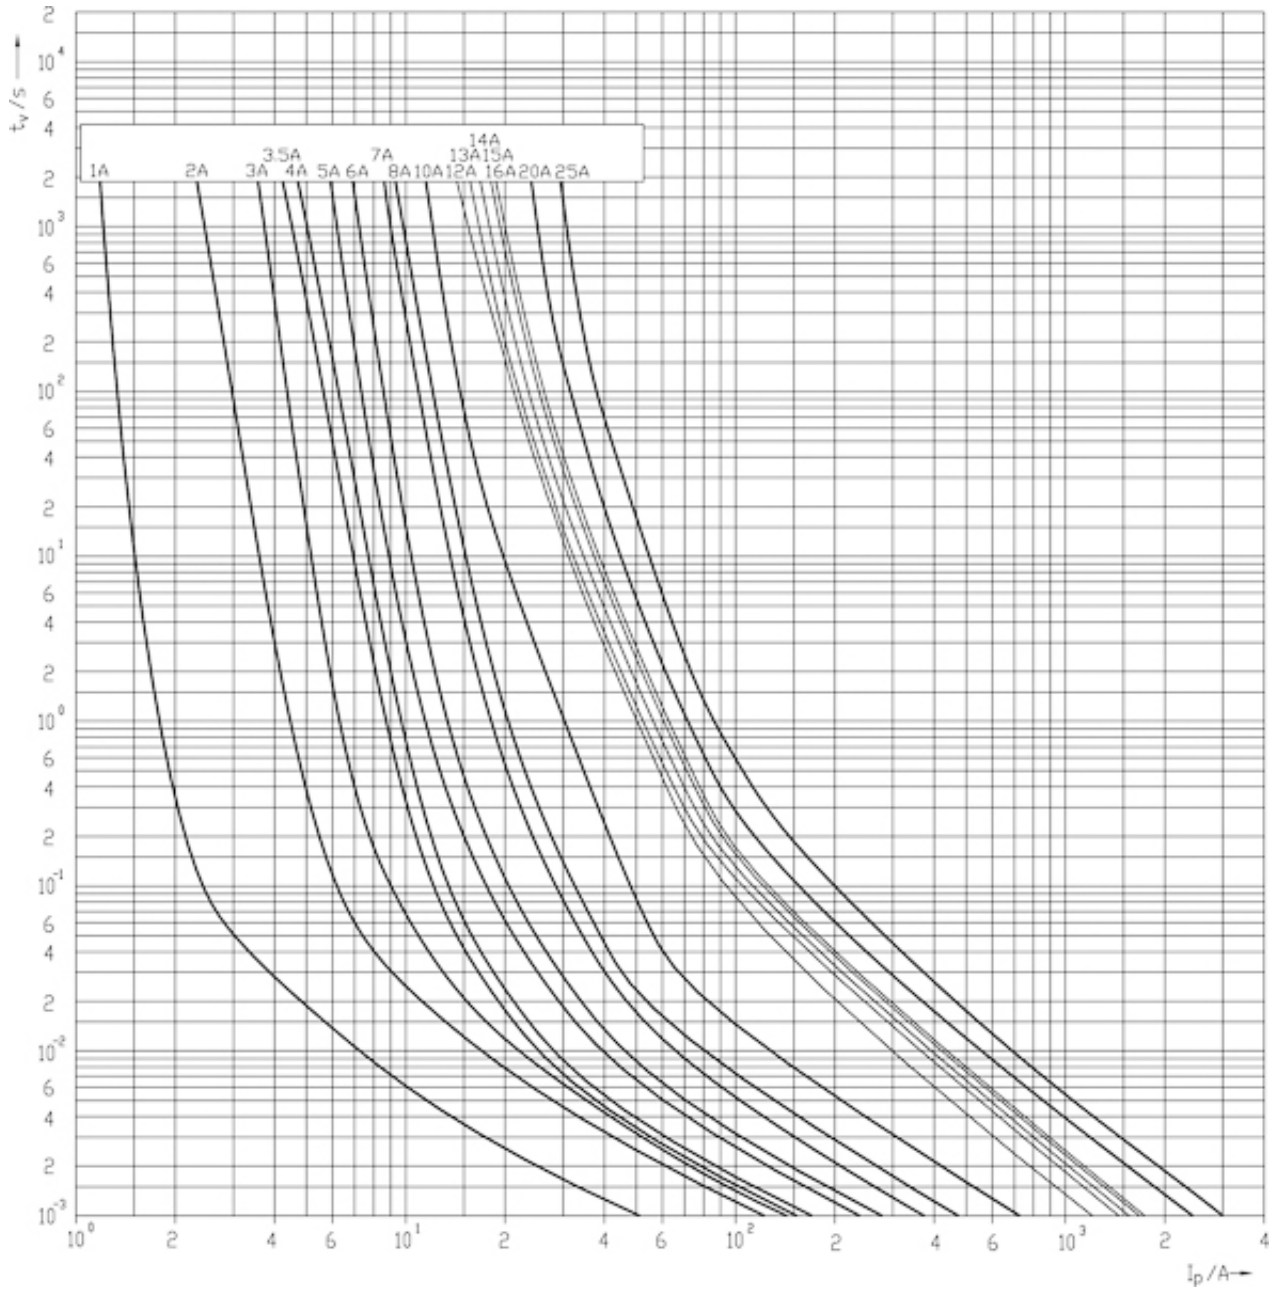

Dimension drawing

